

2011 2nd

Product Catalog

ROHM
SEMICONDUCTOR

Passive Components

Resistors



Resistors

ROHM, the pioneer of chip resistors, offers a wide array of chip resistors that brings added value - in terms of greater reliability, increased miniaturization, and improved performance - to sets of all types.

Select the ideal solution from our complete lineup, including the ultra-compact MCR004 series for portable applications, the high voltage KTR series, the wide terminal LTR series that offers superior reliability, the anti-sulfuration TRR series, and low-ohmic types optimized for current detection (i.e. PMR/PML/UCR/LTR series).

We are also focused on effective use of natural resources, and provide narrow pitch taping and bulk products that reduce waste and resources considerably.











Table of Contents

Resistor Lineup	3 to 5
Nominal Resistance Values	6
Ultra-Low Ohmic Chip Resistors for Current Detection	7
PMR Series	
Ultra-Low Ohmic Wide Terminal Chip Resistors	8
for Current Detection	
PML Series	
Thick Film Low Ohmic Chip Resistors	9
UCR Series	
High Power Wide Terminal Chip Resistors	10
(Low Ohmic Type)	
LTR Series	
Anti-Surge Chip Resistors	11
ESR Series	
High Voltage Resistance Chip Resistors	12
KTR Series	
High Power Wide Terminal Chip Resistors	13
LTR Series	
Sulfuration-Resistant Chip Resistors	14
TRR Series	
0402 Size Ultra-Compact Chip Resistors	15
MCR004 Series	
Narrow Pitch Paper Tape Chip Resistors	16
MCR03 Series	
Dimensions	17,18

Resistor Lineup

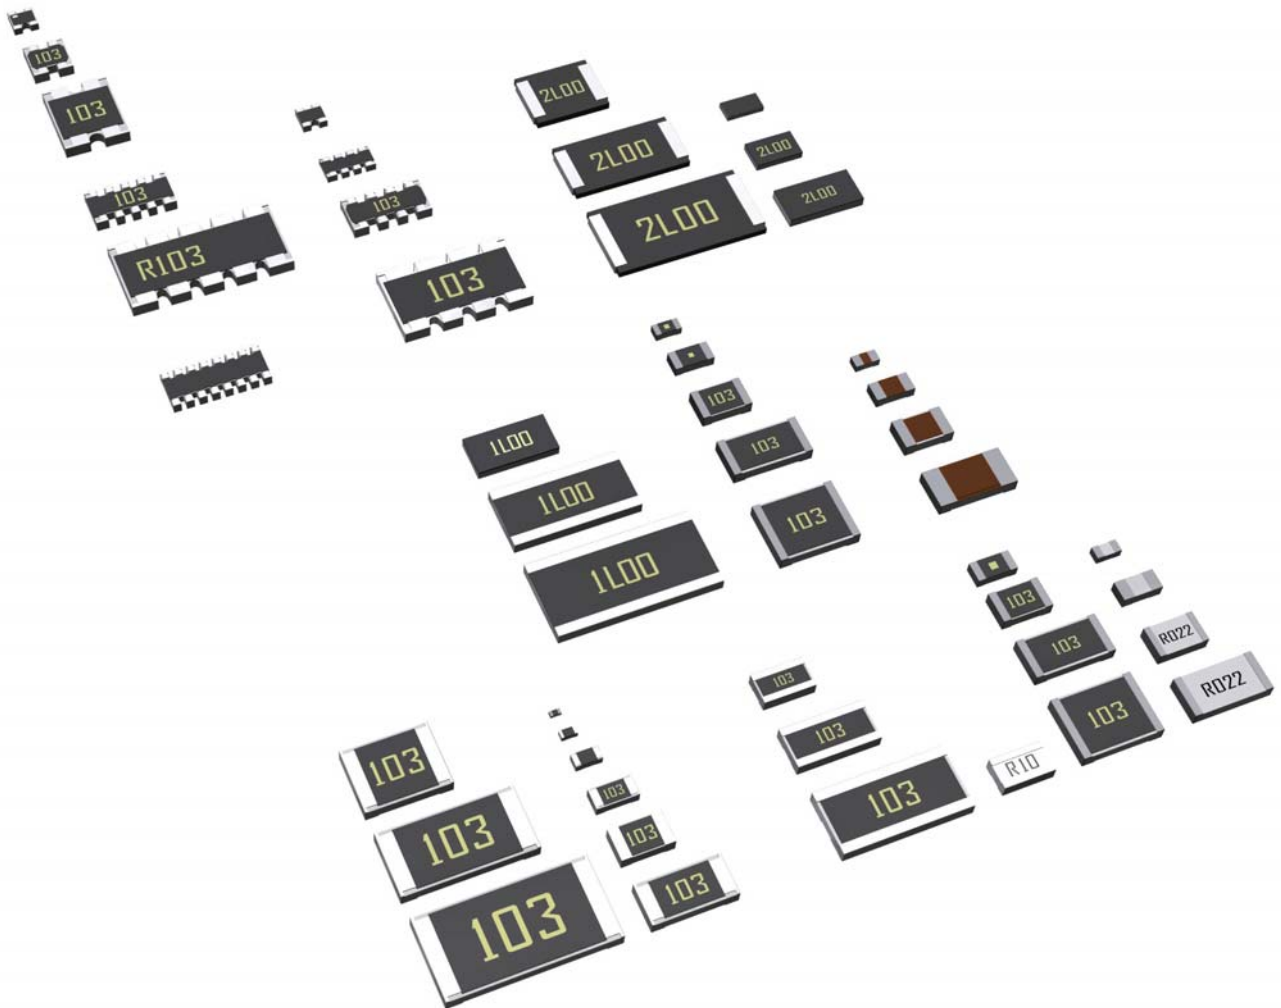Part No.	Size (mm [inch])	Circuit	Rated power (70°C)	Tolerance	Temperature coefficient (ppm/°C)	Resistance range (Ω)	Operating temperature range (°C)		
Compact Thick Film Chip Resistors <MCR Series>									
MCR004	0402 [01005]		1/32W (0.031W)	J(±5%) F(±1%)	±300/±250*	10 to 3M	-55 to +125		
MCR006	0603 [0201]		1/20W (0.05W)	J(±5%) F(±1%) D(±0.5%)	+600/-200/±250* ±250 ±200/±100*	1 to 10M 10 to 10M 10 to 1M			
MCR01	1005 [0402]		1/16W (0.063W)	J(±5%) F(±1%) D(±0.5%)	+500/-250/±200* ±100 ±100/±50*	1 to 10M 10 to 2.2M 10 to 1M			
MCR03	1608 [0603]		1/10W (0.1W)	J(±5%) FX(±1%) D(±0.5%)	±400/±200* ±100 ±100/±50*	1 to 10M 10 to 10M 10 to 1M	-55 to +155		
MCR10	2012 [0805]		1/8W (0.125W)	J(±5%) F(±1%)	±400/±200* ±100	1 to 10M 10 to 2.2M			
				1/10W(0.1W)	D(±0.5%)	±100/±50*	10 to 1M		
Thick Film Chip Resistors <MCR Series>									
MCR18	3216 [1206]			1/4W (0.25W)	J(±5%) F(±1%)	±400/±200* ±100	1 to 10M 10 to 2.2M	-55 to +155	
MCR25	3225 [1210]			1/8W(0.125W)	D(±0.5%)	±100/±50*	10 to 1M		
MCR50	5025 [2010]			1/4W (0.25W)	J(±5%) F(±1%)	500±350/±500/±200* ±100	1 to 3.3M 10 to 1M		
MCR100	6432 [2512]	1/2W (0.5W)		J(±5%) F(±1%)	500±350/±500/±200/±350* ±100	1 to 560k 10 to 180k			
		1W		J(±5%) F(±1%)	500±350/±500/±350/±200* ±100	1 to 100k 10 to 82k			
Low Ohmic Thick Film Chip Resistors <MCR Series>									
MCR01	1005 [0402]		1/16W(0.063W)	F(±1%)	±400	1 to 9.1	-55 to +155		
MCR03	1608 [0603]		1/10W(0.1W)	F(±1%)	±400	1 to 9.1			
MCR10	2012 [0805]		1/4W (0.25W)	J(±5%) F(±1%)	500±300/400±200/±250*	0.047 to 0.91 0.047 to 9.1			
MCR18	3216 [1206]		1/4W (0.25W)	J(±5%) F(±1%)	500±300/400±200/±250*	0.047 to 0.91 0.047 to 9.1			
MCR25	3225 [1210]		1/2W (0.5W)	J(±5%) F(±1%)	300±300/±200*	0.047 to 0.91 0.047 to 9.1			
MCR50	5025 [2010]		1/2W (0.5W)	J(±5%) F(±1%)	500±300/400±200/±250*	0.047 to 0.91 0.047 to 9.1			
MCR100	6432 [2512]		1W	J(±5%) F(±1%)	500±300/400±200/±250*	0.047 to 0.91 0.047 to 9.1			
Narrow Pitch Paper Tape Chip Resistors									
Part No.	Size (mm [inch])		Pitch (Taping)	Minimum Order Quantity					
MCR03MZPJ MCR03MZPFX MCR03MZPD	1608 (0603)		2mm	10,000 pcs.					
Compact Chip Resistor Networks <MNR Series>									
MNR02	1005 [0402] × 2		0.063W / Element	J(±5%)	±300	10 to 1M	-55 to +125		
MNR12	1608 [0603] × 2		0.063W / Element	J(±5%) F(±1%)	±200 ±100				
MNR32	3216 [1206] × 2		0.125W / Element	J(±5%)	±200	10 to 1M	-55 to +125		
MNR04	1005 [0402] × 4		0.063W / Element	J(±5%)	±200				
MNR14	1608 [0603] × 4		0.063W / Element	J(±5%) F(±1%)	±200 ±100				
MNR34	3216 [1206] × 4		0.125W / Element	J(±5%)	±200				
Compact 8-Element Chip Resistor Networks <MNR Series>									
MNR15	1608 [0603] × 5		0.031W / Element	J(±5%)	±200	56 to 100k	-55 to +125		
MNR35	3216 [1206] × 5		0.063W / Element	J(±5%)	±200	56 to 100k			
MNR18	1605 [0602] × 8		0.063W / Element	J(±5%)	±200	10 to 1M			
Chip Attenuators <RCN Series>									
Part No.	Size (mm [inch])	Circuit	No. of pins	No. of elements	Rated power (70°C)	Impedance (Ω)	Voltage standing wave ratio	Operating temperature range (°C)	
RCN02	1010 [0404]		4	3	0.04W / Package	50	Less than 1.3	-55 to +125	


* : The temperature characteristics will vary depending on the resistance value

Part No.	Size (mm [inch])	Circuit	Rated power (70°C)	Tolerance	Temperature coefficient (ppm/°C)	Resistance range (W)	Operating temperature range (°C)
Ultra-Low Ohmic Chip Resistors for Current Detection <PMR Series>							
PMR03	1608[0603]		1/4W (0.25W)	J(±5%) F(±1%)	0 to +150	10m	
PMR10	2012[0805]		1/2W (0.5W)	J(±5%) G(±2%) F(±1%)	±150	2m, 3m, 4m, 5m, 6m, 7m, 8m, 9m, 10m	
PMR18	3216[1206]		1W	J(±5%) F(±1%)	±100		-55 to +155
PMR25	3225[1210]		1W	J(±5%) F(±1%)	±100	1m, 2m, 3m, 4m, 5m	
PMR50	5025[2010]		1W	J(±5%) F(±1%)	±100		
PMR100	6432[2512]		2W	J(±5%) F(±1%)	±100/±150*	6m, 7m, 8m, 9m, 10m	
Ultra-Low Ohmic Wide Terminal Chip Resistors <PML Series>							
New PML10	2012[0805]		0.66W	J(±5%) G(±2%)	±200	1m, 1.5m	
New PML18	3216[1206]		1W	J(±5%) G(±2%)	±150	1m, 1.2m, 1.5m, 2m	-55 to +155
★ PML50	5025[2010]		1.5W(2W at 25°C)	J(±5%)	±200	0.5m, 1m, 1.5m, 2m, 2.2m	
PML100	6432[2512]		2W(3W at 25°C)	J(±5%)	±100	1m, 1.5m, 2m, 2.2m	
Thick Film Low Ohmic Chip Resistors <UCR Series>							
UCR01	1005[0402]		1/8W (0.125W)	J(±5%) F(±1%)	0 to 3000 to 2500 to 200*	68m to 910m	
UCR03	1608[0603]		1/4W (0.25W)	J(±5%) F(±1%)	0 to 2500 to 2000 to 150*	20m to 200m	
			1/5W (0.2W)	J(±5%) F(±1%)	0 to 150	220m to 910m	-55 to +155
UCR10	2012[0805]		1/3W (0.33W)	J(±5%) F(±1%)	250/2000 to 2500 to 150*	11m to 100m	
UCR18	3216[1206]		1/2W (0.5W)	J(±5%) F(±1%)	0 to 250/0 to 150	20m to 100m	
High Power Wide Terminal Chip Resistors (Low Ohmic Type) <LTR Series>							
LTR10	2012[0805]		1/2W (0.5W)	J(±5%) F(±1%)	±150	47m to 9.1	-55 to +155
★ LTR18	3216[1206]		1W	J(±5%) F(±1%)	±300	10m to 9.1	





★ : Under development

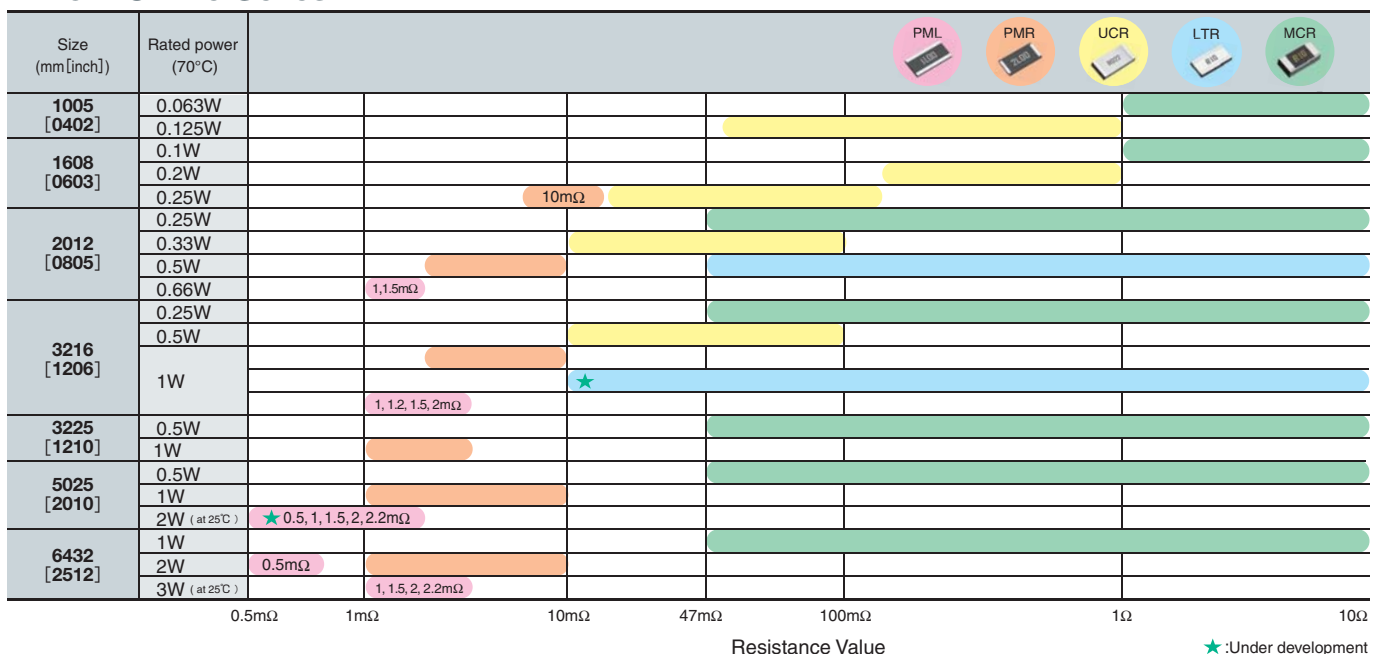* : The temperature characteristics will vary depending on the resistance value

Low Ohmic Series



★ : Under development

Part No.	Size (mm [inch])	Circuit	Rated power (70°C)	Tolerance	Temperature coefficient (ppm/°C)	Resistance range (Ω)	Operating temperature range (°C)				
Anti-Surge Chip Resistors <ESR Series>											
New ESR01	1005 [0402]		1/5W (0.2W)	J(±5%) F(±1%)	±200 ±100	10 to 1M	-55 to +155				
ESR03	1608 [0603]		1/5W (0.2W)	J(±5%) F(±1%) D(±0.5%)	±200 ±100 ±100	1 to 10M 10 to 1M					
			ESR10	2012 [0805]	1/4W (0.25W)	J(±5%) F(±1%) D(±0.5%)		±200 ±100 ±100	1 to 10M 10 to 1M		
					ESR18	3216 [1206]		1/3W (0.33W)	J(±5%) F(±1%) D(±0.5%)	±200 ±100 ±100	1 to 10M 10 to 1M
ESR25	3225 [1210]		1/2W (0.5W)	J(±5%) F(±1%) D(±0.5%)				±200 ±100 ±100	1 to 10M 10 to 1M		
			High Voltage Resistance Chip Resistors <KTR Series>								
KTR03	1608 [0603]			1/10W (0.1W)	J(±5%) F(±1%)	±200 ±100		1 to 10M	-55 to +155		
KTR10	2012 [0805]			1/8W (0.125W)	J(±5%) F(±1%)	±200 ±100		1 to 10M			
KTR18	3216 [1206]			1/4W (0.25W)	J(±5%) F(±1%)	±200 ±100		1 to 10M			
				KTR25	3225 [1210]	1/3W (0.33W)		J(±5%) F(±1%)		±200 ±100	1 to 10M
High Power Wide Terminal Chip Resistors <LTR Series>											
LTR10	2012 [0805]		1/4W (0.25W)	J(±5%) F(±1%) D(±0.5%)	±200 ±100 ±100	1 to 1M 10 to 1M	-55 to +155				
				LTR18	3216 [1206]	1/2W (0.5W)		J(±5%) F(±1%) D(±0.5%)	±200 ±100 ±100	1 to 1M 10 to 1M	
						LTR50		5025 [2010]	1W	J(±5%) F(±1%) D(±0.5%)	±200 ±100 ±100
Sulfuration-Resistant Chip Resistors <TRR Series>											
TRR01	1005 [0402]			1/16W (0.063W)	J(±5%) F(±1%)				+500/-250/±200* ±100	1 to 10M 10 to 2.2M	-55 to +155
TRR03	1608 [0603]			1/10W (0.1W)	J(±5%) F(±1%)	±400/±200* ±100		1 to 10M 10 to 10M			
		TRR10		2012 [0805]	1/8W (0.125W)	J(±5%) F(±1%)	±400/±200* ±100	1 to 10M 10 to 2.2M			
TRR18	3216 [1206]				1/4W (0.25W)	J(±5%) F(±1%)	±400/±200* ±100	1 to 10M 10 to 2.2M			

* : The temperature characteristics will vary depending on the resistance value

Nominal Resistance Values

E3	10				22						47						
E6	10		15		22		33		47		68						
E12	10	12	15	18	22	27	33	39	47	56	68	82					
E24	10	11	12	13	15	16	18	20	22	24	27	30	33	36	39	43	47
	51	56	62	68	75	82	91										
E96	100	102	105	107	110	113	115	118	121	124	127	130	133	137	140	143	147
	150	154	158	162	165	169	174	178	182	187	191	196	200	205	210	215	221
	226	232	237	243	249	255	261	267	274	280	287	294	301	309	316	324	332
	340	348	357	365	374	383	392	402	412	422	432	442	453	464	475	487	499
	511	523	536	549	562	576	590	604	619	634	649	665	681	698	715	732	750
	768	787	806	825	845	866	887	909	931	953	976						

Nominal Resistance

The nominal resistance of each series is listed above. These values are based on approximations of the geometric ratios at right.

Indicated Resistances

Regarding the nominal resistances, products with a resistance tolerance of ±5% are indicated by 3 digits, while ±1% products are denoted by 4 digits. The first 2 or 3 digits (depending on tolerance type) are significant figures, while the last digit signifies the number of zeroes. In addition, an 'R' is used to indicate a decimal point.


- Ex. 1 22Ω→22×10⁰Ω→220 (Indicates a multiplier of '0' → 100)
- Ex. 2 47kΩ→47×10³Ω→473 (Indicates a multiplier of '3' → 103)
- Ex. 3 1.2MΩ→12×10⁵Ω→125 (Indicates a multiplier of '5' → 105)
- Ex. 4 2.7Ω→2R7 ('R' indicates a decimal, for resistances less than 10Ω)
- Ex. 5 1130Ω→113×10¹Ω→1131 (Indicates a multiplier of '1' → 101 - the 4 digits denote F Class products with a tolerance of ±1%)
- Ex. 6 0.10Ω→R10

Series	Ratio	Remarks
E6	$\sqrt[6]{10} \approx 1.46$	
E12	$\sqrt[12]{10} \approx 1.21$	Rounded to 2 significant figures
E24	$\sqrt[24]{10} \approx 1.10$	
E96	$\sqrt[96]{10} \approx 1.02$	Rounded to 3 significant figures

■ For the basic guidelines of the resistor, please refer to the technology report issued by JEITA (Japan Electronics and Information Technology Industries Association): JEITA RCT-2121A 'Guidelines of Notabilia for Fixed Resistors for Use In Electronic Equipment (Safety Application Guide for Fixed Resistors for Use In Electronic Equipment)'.

Notes on Rated Power


• Please reduce the load power based on the derating curve at right for temperatures exceeding the ambient temperature.

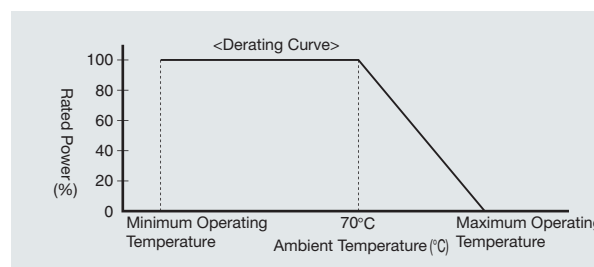

Usage Precautions

- * 1 : Please verify and confirm operation in the event of transient load pulses (large loads in a short time) while mounted in the customer's set. In addition, the performance and reliability of the product may suffer if the load voltage exceeds the rated value during steady state operation. Therefore, please ensure that the rated voltage is not exceeded.
- * 2 : The Rated Voltage (V) is calculated by $\sqrt{\text{Rated Power (W)} \times \text{Nominal Resistance } (\Omega)}$ or the Limiting Element Voltage, whichever is smaller.

Ultra-Low Ohmic Chip Resistors for Current Detection

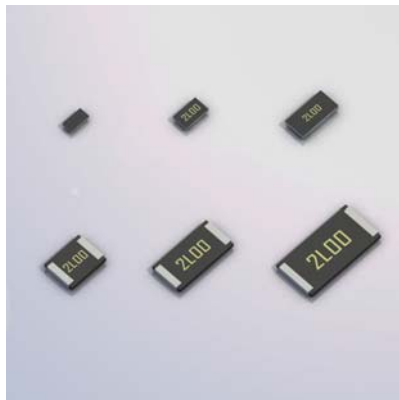

PMR Series (1mΩ~)

Summary

These products feature a resistive element comprised of a metallic substrate with superior electrical characteristics. An original structure is utilized for low resistance values (1mΩ to 10mΩ) with improved current detection accuracy.

Features


- Compact
- High power
- High performance

Applications

- Current detection sets
- Notebook PCs, HDDs, mobile phones, DC/DC converters, automotive systems, and more


Trimless design ensures greater current detection accuracy

- Ideal for high-speed switching circuits
- Excellent heat dissipation characteristics
- Stable operation, even under extreme temperature fluctuations

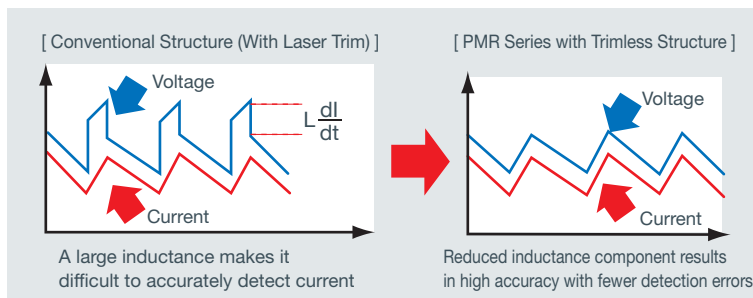


Superior resistance-temperature characteristics

- Stable resistance temperature characteristics

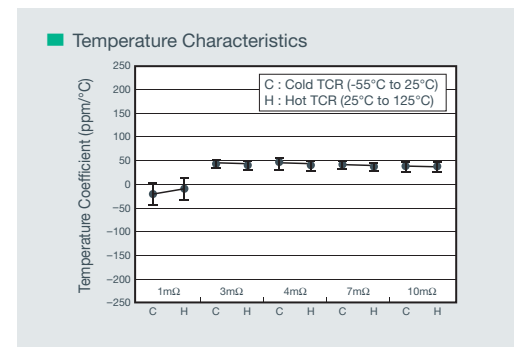

Circuit Examples

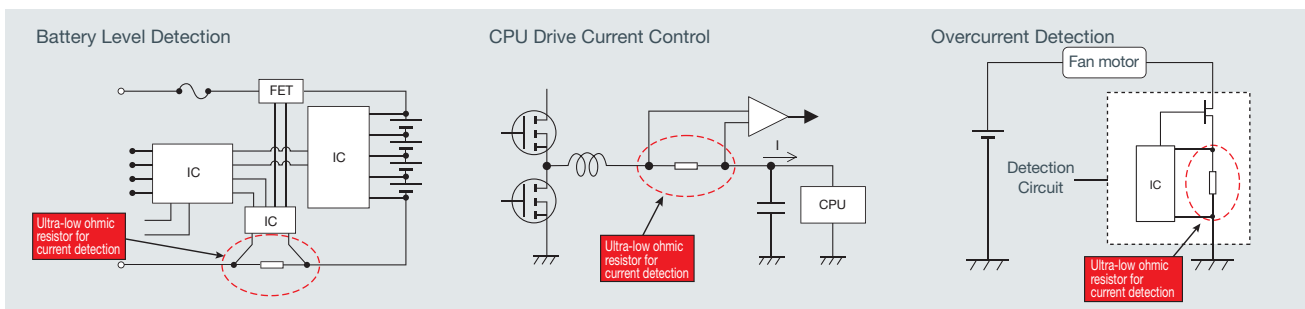


Lineup

Part No.	Size (mm [inch])	Rated power (70°C)	Tolerance	Temperature coefficient (ppm/°C)	Resistance range (mΩ)	Operating temperature range (°C)
PMR03	1608 [0603]	1/4W (0.25W)	J(±5%) F(±1%)	0 to +150	10	
PMR10	2012 [0805]	1/2W (0.5W)	J(±5%) G(±2%) F(±1%)	±150	2, 3, 4, 5, 6, 7, 8, 9, 10	
PMR18	3216 [1206]	1W	J(±5%) F(±1%)	±100		-55 to +155
PMR25	3225 [1210]	1W	J(±5%) F(±1%)	±100	1, 2, 3, 4, 5	
PMR50	5025 [2010]	1W	J(±5%) F(±1%)	±100	1, 2, 3, 4, 5, 6, 7, 8, 9, 10	
PMR100	6432 [2512]	2W	J(±5%) F(±1%)	±100 *		

*1mΩ and 2mΩ only: ±150ppm/°C

Ultra-Low Ohmic Wide Terminal Chip Resistors for Current Detection

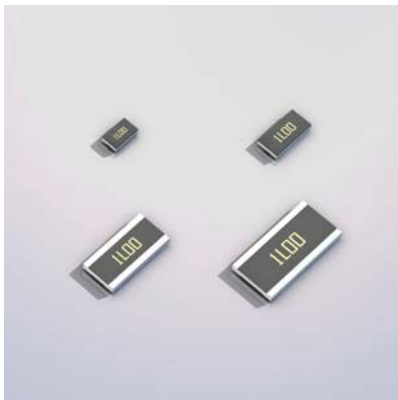

PML Series (0.5mΩ~)

Summary

These low-ohmic (0.5mΩ to 2.2mΩ), wide terminal types optimized for current detection utilize a metallic substrate for the resistive element that provides excellent electrical characteristics, along with a novel design that improves current detection precision.

Features


- High power
- High performance
- High reliability

Applications


- Automotive (i.e. power steering, ECU)
- Current detection in large current motors

Wide terminal configuration improves reliability


Wider contact area with the mounting plate provides a more reliable connection. Ideal for vehicle applications exposed to temperature cycling / fluctuations.

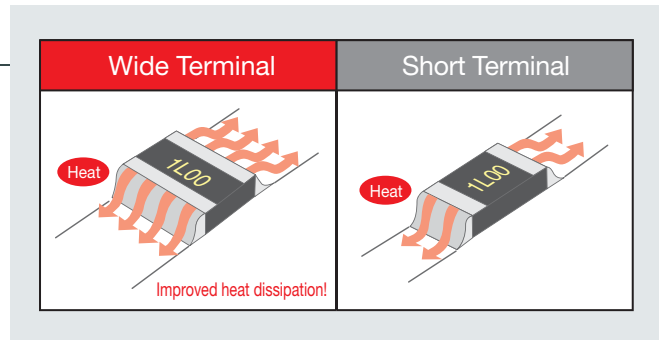

High rated power

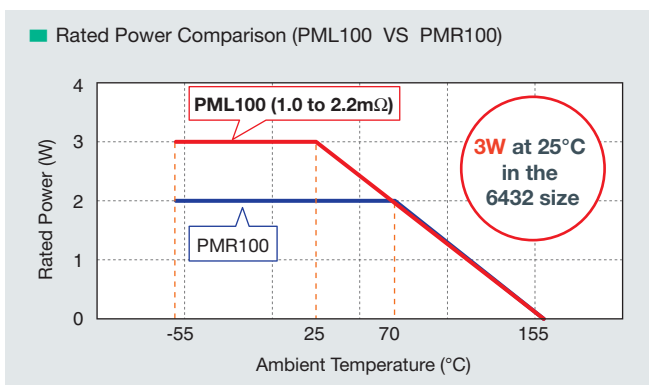

Application Examples

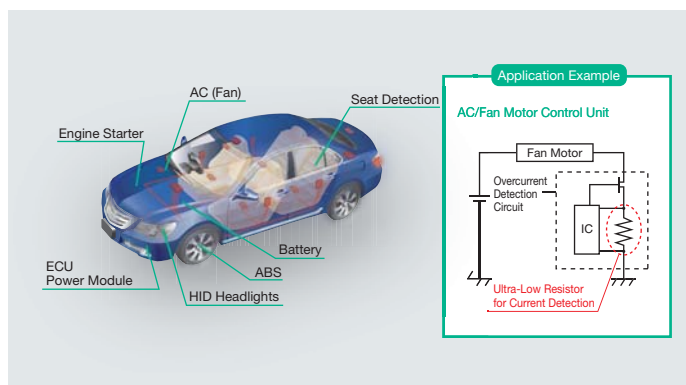


Lineup

Part No.	Size (mm [inch])	Rated power (70°C)	Tolerance	Temperature coefficient (ppm/°C)	Resistance range (mΩ)	Operating temperature range (°C)
New PML10	2012[0805]	0.66W	J(±5%) G(±2%)	±200	1.0, 1.5	
New PML18	3216[1206]	1W	J(±5%) G(±2%)	±150	1.0, 1.2, 1.5, 2.0	-55~+155
★ PML50	5025[2010]	1.5W (2W at 25°C)	J(±5%)	±200	0.5, 1.0, 1.5, 2.0, 2.2	
PML100	6432[2512]	2W (3W at 25°C)	J(±5%)	±100	1.0, 1.5, 2.0, 2.2	
		2W		±150		

★ : Under development

*The designs and specifications are subject to change without notice

Thick Film Low Ohmic Chip Resistors

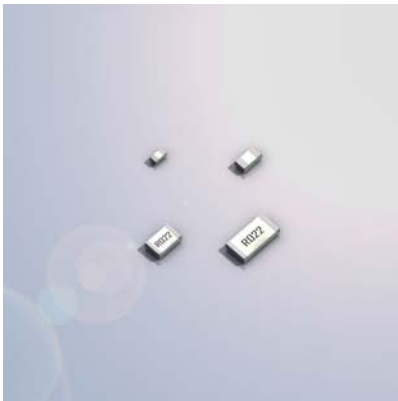

UCR Series (11mΩ~)

Summary

The rear-mount design ensures high detection accuracy in a range of resistances (11mΩ to 910mΩ).

Features


- Compact
- High performance

Applications

- Notebook PCs, mobile phones, HDDs, portable audio players, power supplies, motors, and more


Rear-mount configuration

The UCR series is configured with the resistive element at the base (rear).

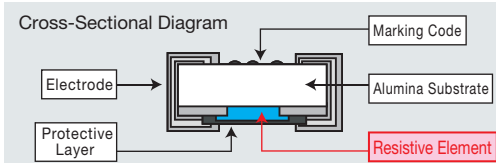

Resistance variations minimized during mounting

The rear-mount configuration shortens the current pathway by eliminating excess components.

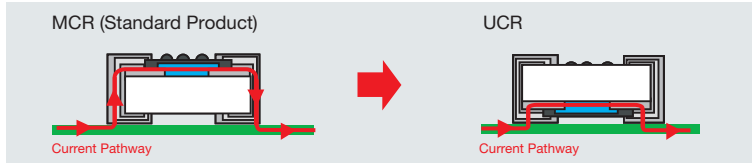


Higher rated power

The original structure increases the rated power.

Size (mm[inch])	UCR Series	ROHM's Standard Resistors
1005 [0402]	0.125W	0.063W
1608 [0603]	0.25W/0.2W	0.1W
2012 [0805]	0.33W	0.25W
3216 [1206]	0.5W	0.25W
3225 [1210]	-	0.5W

Stable, low resistance characteristics guaranteed - regardless of ambient conditions

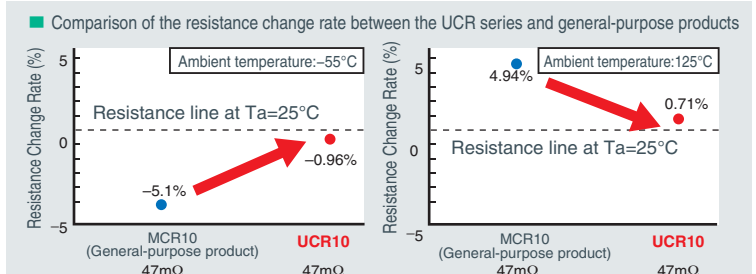

Lineup

Part No.	Size (mm [inch])	Rated power (70°C)	Tolerance	Temperature coefficient (ppm/°C)	Resistance range (Ω)	Operating temperature range (°C)
UCR01	1005 [0402]	1/8W (0.125W)	J(±5%) F(±1%)	0 to 300	68m to 91m	
				0 to 250	100m to 200m	
				0 to 200	220m to 910m	
UCR03	1608 [0603]	1/4W (0.25W) 1/5W (0.2W)	J(±5%) F(±1%)	0 to 250	20m to 047m	
				0 to 200	51m to 91m	
				0 to 150	100m to 200m	
UCR10	2012 [0805]	1/3W (0.33W)	J(±5%) F(±1%)	250±200	11m to 18m	-55 to +155
				0 to 250	20m to 47m	
				0 to 150	51m to 100m	
				0 to 250	20m to 47m	
UCR18	3216 [1206]	1/2W (0.5W)	J(±5%) F(±1%)	0 to 350	11m to 18m	
				0 to 200	20m to 39m	
				0 to 150	43m to 100m	

* The designs and specifications are subject to change without notice

High Power Wide Terminal Chip Resistors (Low Ohmic Type)

LTR Series (10mΩ~)



Summary

These wide terminal chip resistors improve thermal dissipation for higher rated power.


Features

- High power
- High performance
- High reliability

Applications


- Automotive systems
- PCs, HDDs, mobile phones, power supplies, motors and other applications requiring current detection

Wide terminal design strong against temperature cycling

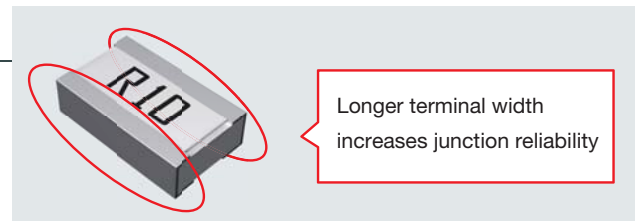

Rear-mount design improves current detection accuracy

Rear-mount construction minimizes resistance changes during mounting.

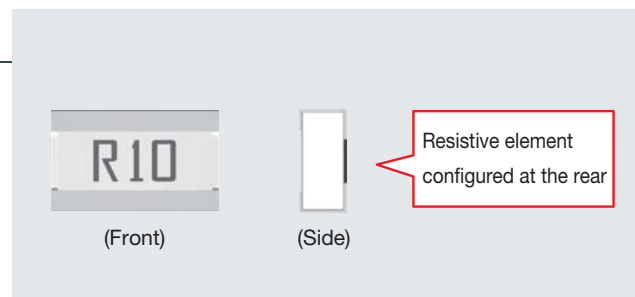

Higher rated power

Size (mm [inch])	General-purpose MCR Series	LTR Series
2012 [0805]	0.25W	0.5W
3216 [1206]	0.25W	1W

Superior resistance-temperature coefficient

Size (mm [inch])	General-purpose MCR Series	LTR Series
2012 [0805]	500±300 (0.047 to 0.091Ω)	Improved TCR ±150
	400±200 (0.1 to 0.13Ω)	
	±250 (0.15 to 9.1Ω)	


Lineup

Part No.	Size (mm [inch])	Rated power (70°C)	Tolerance	Temperature coefficient (ppm/°C)	Resistance range (Ω)	Operating temperature range (°C)
LTR10	2012[0805]	1/2W (0.5W)	J(±5%) F(±1%)	±150	47m to 9.1	-55 to +155
★ LTR18	3216[1206]	1W	J(±5%) F(±1%)	±300	10m to 9.1	

★ : Under development

* The designs and specifications are subject to change without notice

Anti-Surge Chip Resistors

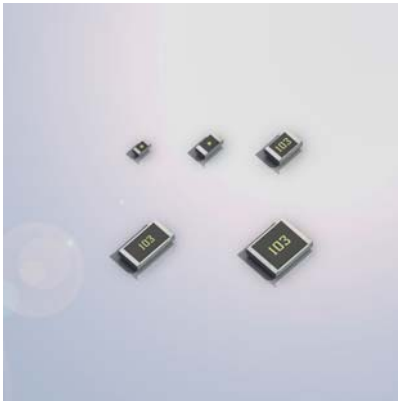

ESR Series

Summary

Significantly improved anti-surge characteristics have been achieved through utilization of original resistor construction and trimming processes.

Features


- Small
- Surge-resistant
- High power

Applications

- Electronic devices requiring anti-surge and anti-pulse characteristics

2kV to 5kV* electrostatic discharge resistance (*EIAJ4701-1 Human Body Model)


An electrostatic discharge resistance of 3kV has been achieved using novel construction and trimming processes, resulting in a greater degree of reliability.



	ESR01	ESR03/10/18	ESR25
DCV (Applied Voltage)	2kV	3kV	5kV
No. of Cycles	±5 times	±10 times	±10 times
C (Capacitance)	100pF	100pF	100pF
R1 (Discharge Resistance)	1.5kΩ	1.5kΩ	1.5kΩ

Significant improvement in endurance surge characteristics

Anti-surge Chip Resistors (ESR Series) vs. Conventional Chip Resistors (MCR Series)

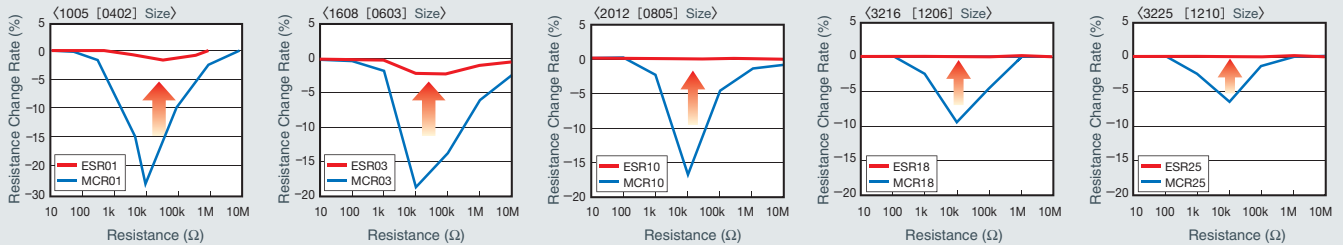

Double the conventional rated power

A higher rated power enables smaller resistors to be used, saving space.


Size(mm [inch])	ESR Series	General-purpose MCR Series
New 1005 [0402]	0.2W	0.063W
1608 [0603]	0.2W	0.1W
2012 [0805]	0.25W	0.125W
3216 [1206]	0.33W	0.25W
3225 [1210]	0.5W	0.25W
5025 [2010]	-	0.5W

Downsizing

Lineup

Part No.	Size (mm [inch])	Rated power (70°C)	Tolerance	Temperature coefficient (ppm/°C)	Resistance range (Ω)	Operating temperature range (°C)
New ESR01	1005 [0402]	1/5W (0.2W)	J(±5%) F(±1%)	±200 ±100	10 to 1M	-55 to +155
ESR03	1608 [0603]	1/5W (0.2W)	J(±5%)	±200	1 to 10M	
			F(±1%)	±100	10 to 1M	
ESR10	2012 [0805]	1/4W (0.25W)	D(±0.5%)	±100	1 to 10M	
			J(±5%)	±200	10 to 1M	
			F(±1%)	±100	10 to 1M	
ESR18	3216 [1206]	1/3W (0.33W)	D(±0.5%)	±100	1 to 10M	
			J(±5%)	±200	10 to 1M	
			F(±1%)	±100	10 to 1M	
ESR25	3225 [1210]	1/2W (0.5W)	D(±0.5%)	±100	1 to 10M	
			J(±5%)	±200	10 to 1M	
			F(±1%)	±100	10 to 1M	

High Voltage Resistance Chip Resistors

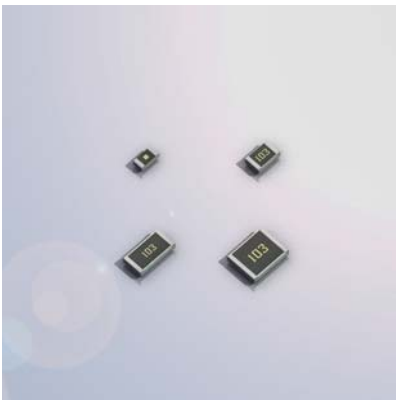

KTR Series

Summary

High voltage characteristics (more than double that of conventional products) are made possible through the use of proprietary construction and trimming processes.

Features

- Compact
- High voltage

Applications

- Camera flash circuits
- Inverter circuits
- Power supplies

High voltage resistance

ROHM's unique resistance pattern and trimming design prevent concentration of the voltage load, resulting in more than twice the voltage resistance of our own general-purpose products (MCR series).


High voltage resistance circuits requiring multiple resistors can reduce the number of components by replacing conventional chip resistors with KTR series units. They are ideal for mobile products, which are becoming increasingly compact and thin.

[Limiting Element Voltage]


The rated voltage is defined as the maximum voltage that can be applied continuously and is calculated using the following equation:

$$\text{Rated Voltage (V)} = \sqrt{\text{Rated Power (W)} \times \text{Nominal Resistance (\Omega)}}$$

Note that the limiting element voltage of the element should not to be exceeded.

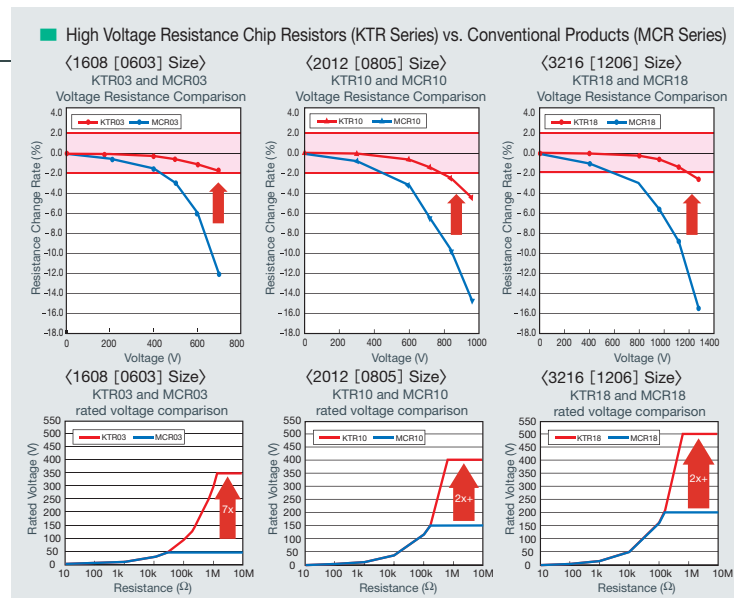


Circuit Examples

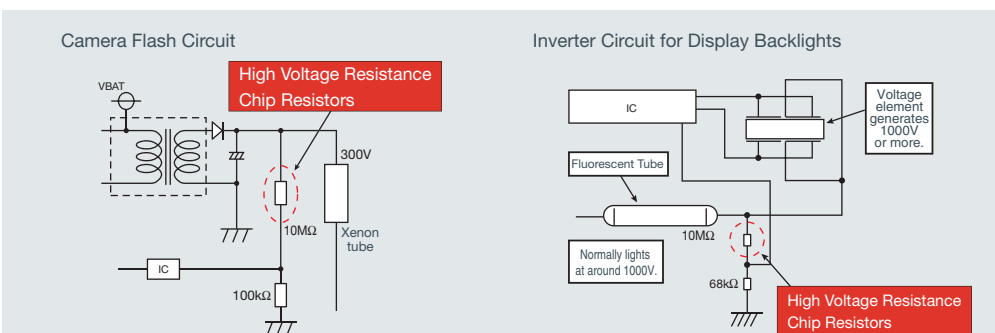

Lineup

Part No.	Size (mm [inch])	Rated power (70°C)	Limiting Element Voltage(V)	Tolerance	Temperature coefficient (ppm/°C)	Resistance range (Ω)	Operating temperature range (°C)
KTR03	1608 [0603]	1/10W (0.1W)	350	J(±5%)	±200	1 to 10M	
				F(±1%)	±100		
KTR10	2012 [0805]	1/8W (0.125W)	400	J(±5%)	±200	1 to 10M	
				F(±1%)	±100		
KTR18	3216 [1206]	1/4W (0.25W)	500	J(±5%)	±200	1 to 10M	-55 to +155
				F(±1%)	±100		
KTR25	3225 [1210]	1/3W (0.33W)	600	J(±5%) F(±1%)	±200 ±100	1 to 10M	

High Power Wide Terminal Chip Resistors

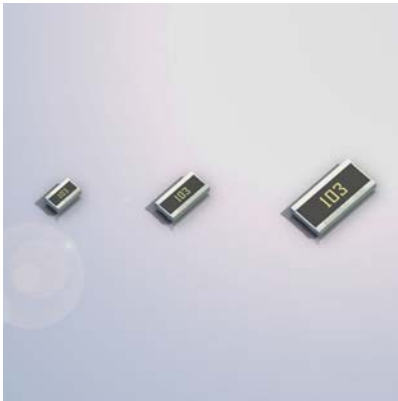

LTR Series

Summary

Placing the electrodes on the long sides of the resistor reduces the distance between the electrodes, improving temperature cycling strength.

Features

- High power
- Strong against surges
- Improved junction reliability


Applications

- Automotive systems
- Home appliances
- Power supplies and the like

Superior connection reliability against thermal cycling

- Outstanding junction reliability characteristics against heat cycling. The LTR series is highly resistant to soldering cracks caused by thermal stress.

	Wide Terminal LTR Series	General-purpose MCR Series
Distance Between Electrodes	Short	Long
Effects of PCB Expansion/Contraction	Mechanical stress on junction area small	Mechanical stress on junction area large
Junction Reliability	Very good	Good

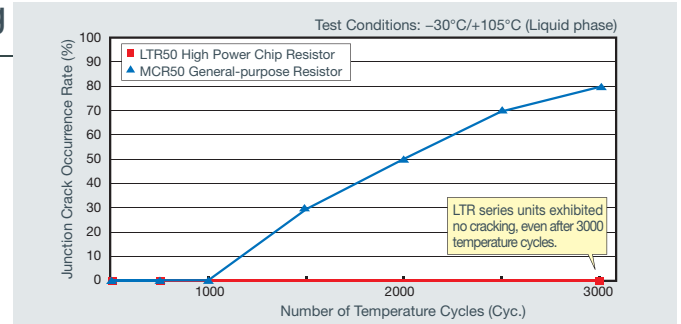

Significantly higher rated power



Higher rated power makes it possible to use smaller resistors.

Size(mm [inch])	LTR Series	MCR Series
2012[0805]	0.25	0.125
3216[1206]	0.5	0.25
5025[2010]	1	0.5
6432[2512]	-	1

3kV* electrostatic discharge resistance

(*EIAJ4710-1 Human Body Model)

ROHM's unique resistive element structure and trimming design ensure greatly improved surge resistance characteristics.

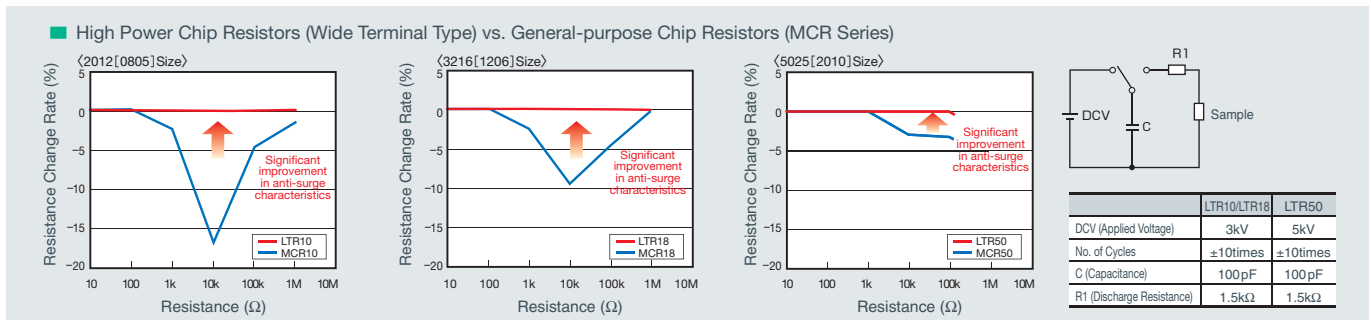


	LTR10/LTR18	LTR50
DCV (Applied Voltage)	3kV	5kV
No. of Cycles	±10times	±10times
C (Capacitance)	100 pF	100 pF
R1 (Discharge Resistance)	1.5kΩ	1.5kΩ

Lineup

Part No.	Size (mm [inch])	Rated power (70°C)	Tolerance	Temperature coefficient (ppm/°C)	Resistance range (Ω)	Operating temperature range (°C)
LTR10	2012 [0805]	1/4W (0.25W)	J(±5%)	±200	1 to 1M	
			F(±1%)	±100		
			D(±0.5%)	±100		
LTR18	3216 [1206]	1/2W (0.5W)	J(±5%)	±200	1 to 1M	-55 to +155
			F(±1%)	±100		
			D(±0.5%)	±100		
LTR50	5025 [2010]	1W	J(±5%)	±200	1 to 1M	
			F(±1%)	±100		
			D(±0.5%)	±100		

Sulfuration-Resistant Chip Resistors

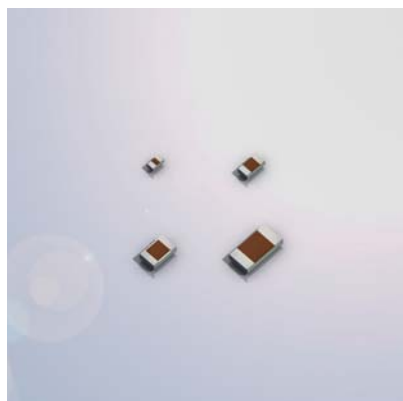

TRR Series

Summary

The special internal structure prevents sulfurated gases from entering, resulting in greater reliability and stabler operation in sulfur-rich environments compared to general-purpose products.

Features


- High sulfuration resistance

Applications

- Circuits exposed to sulfur-rich environments, such as those in automotive systems.

Excellent anti-sulfuration characteristics

Until now, resistors were particularly susceptible to failure in sulfur-rich environments. In response to this, ROHM's offers the TRR series featuring an internal structure resistant to silver migration and the formation of silver sulfide, resulting in a greater level of reliability.

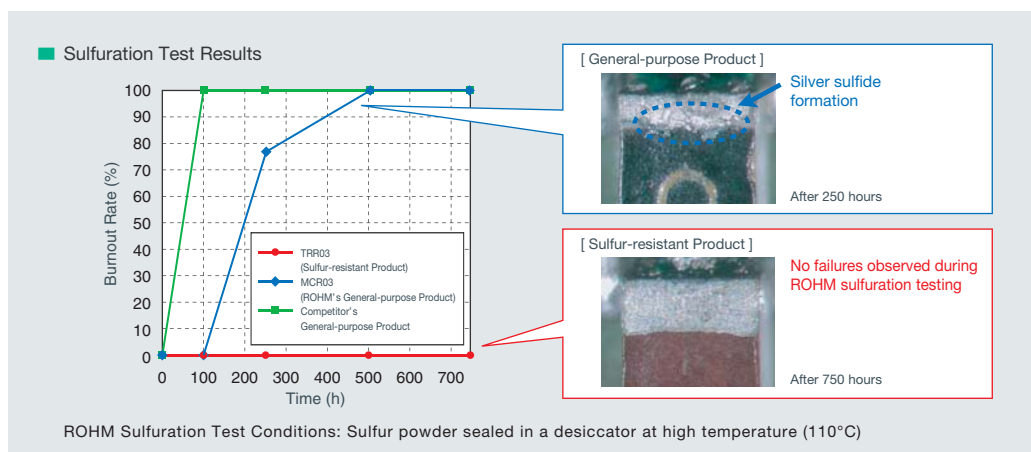

Lineup

Part No.	Size (mm [inch])	Rated power (70°C)	Tolerance	Temperature coefficient (ppm/°C)	Resistance range (Ω)	Operating temperature range (°C)
TRR01	1005 [0402]	1/16W (0.063W)	J(±5%)	+500/-250	1 to 9.1	
			F(±1%)	±200	10 to 10M	
TRR03	1608 [0603]	1/10W (0.1W)	J(±5%)	±100	10 to 2.2M	
			F(±1%)	±400	1 to 9.1	
TRR10	2012 [0805]	1/8W (0.125W)	J(±5%)	±200	10 to 10M	-55 to +155
			F(±1%)	±100	10 to 10M	
TRR18	3216 [1206]	1/4W (0.25W)	J(±5%)	±400	1 to 9.1	
			F(±1%)	±200	10 to 10M	
				±100	10 to 2.2M	

Also compatible with jumpers.

0402-Sized Ultra-Compact Chip Resistors



MCR004 Series

Summary

ROHM's 0402-sized ultra-compact chip resistors are the smallest in the world, contributing to increased space savings in mobile devices and module products.

Features


- Compact
- Space-saving

Applications

- Modules
- Portable audio
- Mobile phones
- Digital cameras


Lightweight · Space-saving

The MCR004 (0402) series reduces mounting area and weight by 56% and 72%, respectively, contributing to even greater miniaturization.

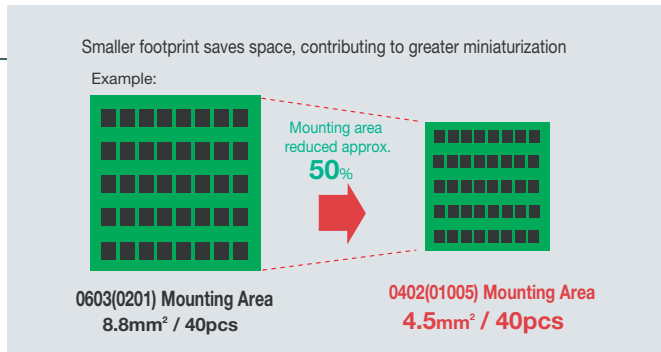

High dimensional precision

Ultra-compact chip resistors in the 0402 and 0603 size require more precise process technologies (compared to conventional processes) in order to ensure high dimensional accuracy.

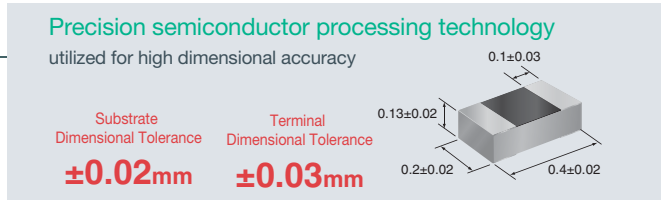


Press carrier tape applications

Press carrier tape is used in order to reduce failures during the mounting process.

— Press Carrier Tape Features —

- No adhesive substance on the bottom of the pocket (bottom tape not used).
- Highly precise pocket position.

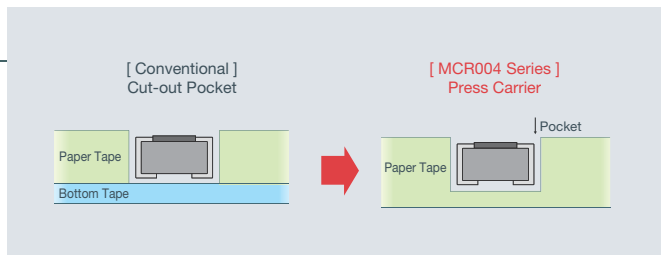

Lineup


Part No.	Size (mm [inch])	Rated power (70°C)	Tolerance	Temperature coefficient (ppm/°C)	Resistance range (Ω)	Operating temperature range (°C)
MCR004	0402 [01005]	1/32W (0.031W)	J(±5%)	±300	10 to 91	-55 to +125
			F(±1%)	±250	100 to 3M	

Also compatible with jumpers.

<Taping Specifications>

Part No.	Taping No.	Taping specs	Min. order quantity (pcs)
MCR004	YZP	Paper tape (2mm pitch)	15,000
	RZP	Embossed tape (1mm pitch)	40,000

Narrow Pitch Paper Tape Products

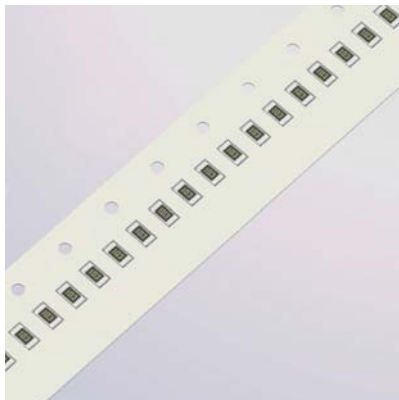

MCR03MZP Series

Summary

Half the pitch of standard products results in double the quantity per reel in the same reel size (φ180mm).

Features

- Halves the number of reel changes
- Cuts the amount of packaging waste by 50%

Applications



- All products

Doubles the time between reel replacement. Cuts package waste in half.



No new equipment required · Easy to install

Improves productivity by halving the number of reel replacements








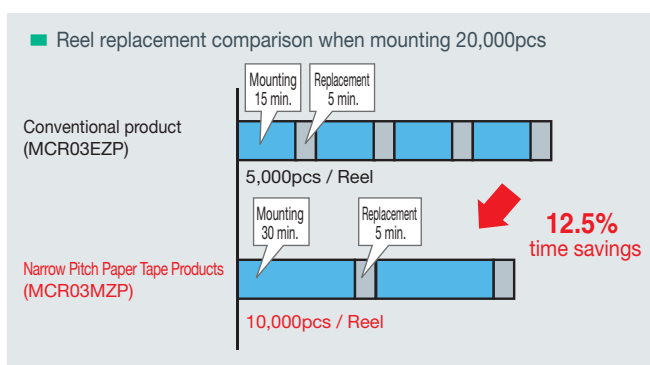
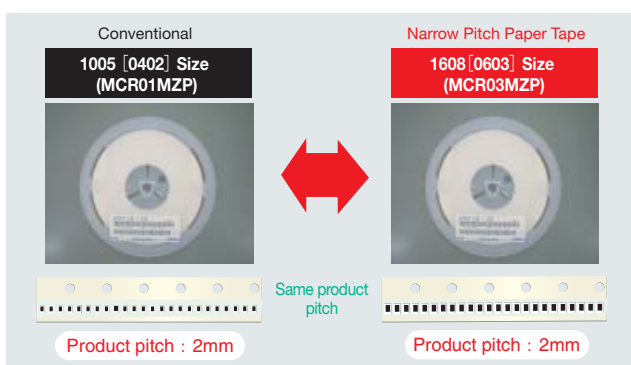


Lineup

Part No.	Size (mm [inch])	Product Pitch (Taping)	Reel
MCR03MZPJ	1608 [0603]	2mm	10,000 pcs.
MCR03MZPFX			
MCR03MZPD			

Dimensions

Unit : mm

Dimensions	Series	L	W	t	a	b
0402 (01005) 	MCR004	0.4±0.02	0.2±0.02	0.13±0.02	0.1±0.03	0.1±0.03
0603 (0201) 	MCR006	0.6±0.03	0.3±0.03	0.23±0.03	0.1±0.05	0.15±0.05
1005 (0402) 	MCR01	1.0±0.05	0.5±0.05	0.35±0.05	0.2±0.1	0.25 ^{+0.05} _{-0.1}
	ESR01				0.33±0.08	
	TRR01					
1608 (Partial Marking Code) (0603) 	MCR03	1.6±0.1	0.8±0.1	0.45±0.1	0.3±0.2	0.3±0.2
	KTR03					
	ESR03					
	TRR03				0.4±0.1	
	PMR03	1.6±0.15	0.8±0.15	0.25±0.15	—	0.35±0.15
2012 (0805) 	MCR10	2.0±0.1	1.25±0.1	0.55±0.1	0.4±0.2	0.4±0.2
	KTR10					
	ESR10					
	TRR10				0.43 ^{+0.15} _{-0.1}	
	PMR10	2.0±0.15	1.2±0.15	0.42 to 0.28* ±0.15	—	0.75 to 0.35* ±0.15
3216 (1206) 	MCR18	3.2±0.15	1.6±0.15	0.55±0.1	0.5±0.25	0.5±0.25
	KTR18					
	ESR18					
	TRR18				0.69 ^{+0.2} _{-0.15}	
	PMR18	3.2±0.15	1.6±0.15	0.42 to 0.28* ±0.15	—	1.15 to 0.6* ±0.15
3225 (1210) 	MCR25	3.2±0.15	2.5±0.15	0.55±0.15	0.5±0.25	0.5±0.25
	KTR25				0.55±0.1	
	ESR25				0.55±0.15	
	PMR25	3.2±0.2	2.5±0.2	0.52 to 0.32* ±0.15	0.5±0.2	1.0 to 0.8* ±0.2
5025 (2010) 	MCR50	5.0±0.15	2.5±0.15	0.55±0.15	0.6±0.25	0.6±0.25
	PMR50	5.0±0.2	2.5±0.2	0.52 to 0.32* ±0.15	0.5±0.2	1.85 to 0.9* ±0.2
6432 (2512) 	MCR100	6.3±0.15	3.2±0.15	0.55±0.15	0.6±0.25	0.6±0.25
	PMR100	6.4±0.25	3.2±0.25	0.52 to 0.32* ±0.15	0.5±0.25	2.3 to 1.1* ±0.25

Note: Numbers in () indicate the size in inches
 *May vary depending on the resistance value. For additional details, please consult with a local sales representative.

<p>●UCR01</p>	<p>●UCR03</p>	<p>●UCR10</p>	<p>●UCR18</p>
<p>●LTR10<Low ohmic></p>	<p>●LTR10</p>	<p>●LTR18</p>	<p>●LTR50</p>
<p>●PML10</p>	<p>●PML18</p>	<p>●PML50</p>	<p>●PML100</p>

* May vary depending on the resistance value. For additional details, please consult with a local sales representative.

<p>●MNR02</p>	<p>●MNR04</p>	<p>●MNR12</p>
<p>●MNR14</p>	<p>●MNR32</p>	<p>●MNR34</p>
<p>●MNR15</p>	<p>●MNR18 (Partial Marking Code)</p>	<p>●MNR35</p>
<p>●RCN02</p>		

The content specified in this document is correct as of 11th April, 2011.

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co., Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.

ROHM Sales Offices

Contact us for further information about the products.

San Diego	+1-858-625-3600	Mexico	+52-33-3123-2001	Spain	+34-9375-24320	Kaohsiung	+886-7-237-0881
Atlanta	+1-770-754-5972	Dusseldorf	+49-2154-921-0	Hungary	+361-4719338	Singapore	+65-6332-2322
Boston	+1-978-371-0382	Munich	+49-8999-216168	Russia	+74 95 739 4174	Philippines	+63-2-807-6872
Chicago	+1-847-368-1006	Stuttgart	+49-711-7272370	Seoul	+82-2-8182-700	Thailand	+66-2-254-4890
Dallas	+1-972-473-3748	France	+33 (0) 1 40 60 87 30	Dalian	+86-411-8230-8549	Malaysia	+60-3-7958-8355
Denver	+1-303-708-0908	United Kingdom	+44-1-908-272400	Shanghai	+86-21-6279-2727	India	+91-44-4352-0008
Detroit	+1-248-348-9920	Espoo	+358-9-7255-4491	Shenzhen	+86-755-8307-3008	Kyoto	+81-75-365-1218
Nashville	+1-615-620-6700	Salo	+358-2-7332234	Hong Kong	+852-2-740-6262	Yokohama	+81-45-476-2121
Sunnyvale	+1-408-720-1900	Oulu	+358-400-726 124	Taipei	+886-2-2500-6956		

R1041A

ROHM Co., Ltd.

21 Sain Mizosaki-cho, Ukyo-ku,
Kyoto 615-8585 Japan

TEL : +81-75-311-2121 FAX : +81-75-315-0172

www.rohm.com

ROHM
SEMICONDUCTOR